


Front Side Door Trim Replacement

Removal Procedure


1. [Front Side Door Pull Handle Cover Replacement](#) » Remove

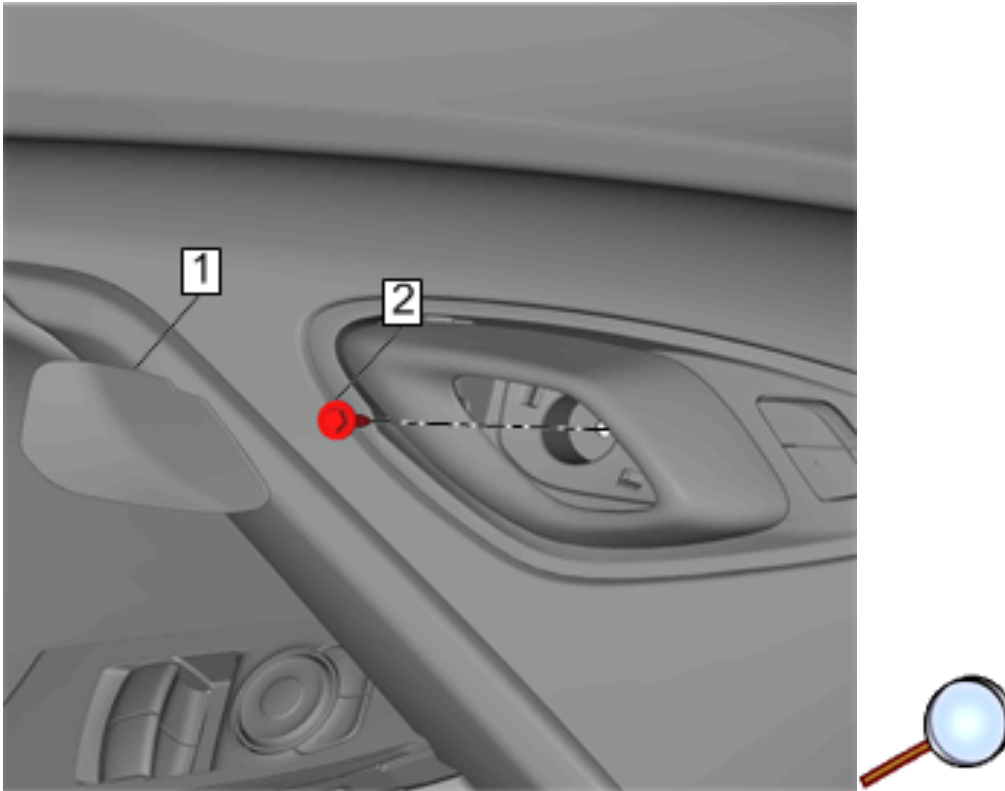


Note: Use a suitable tool. Place the tool between the notch located at the top of the door handle cap and the door handle. Turn the suitable tool clockwise releasing the door handle cap, exposing the handle fastener.

2. Front Side Door Inside Handle Bolt Finish Cap (1) » Remove
3. Front Side Door Trim Bolt (2) » Remove

© 2016 General Motors. All rights reserved.

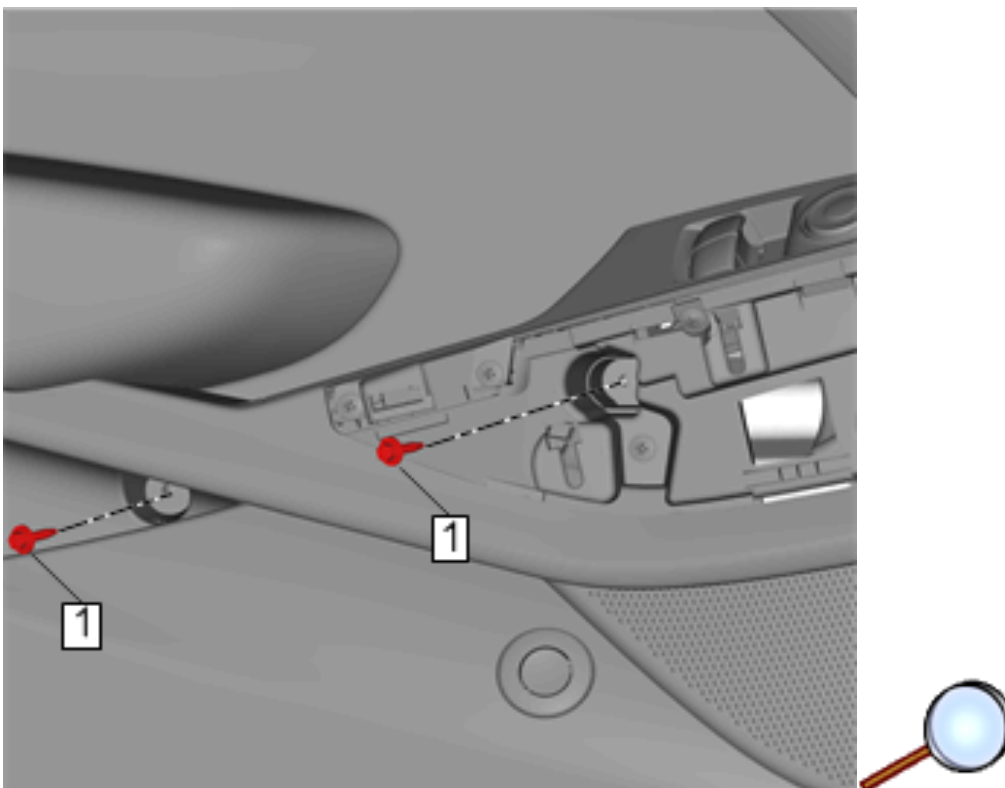


4. Front Side Door Trim Bolt (1) » Remove [2x]

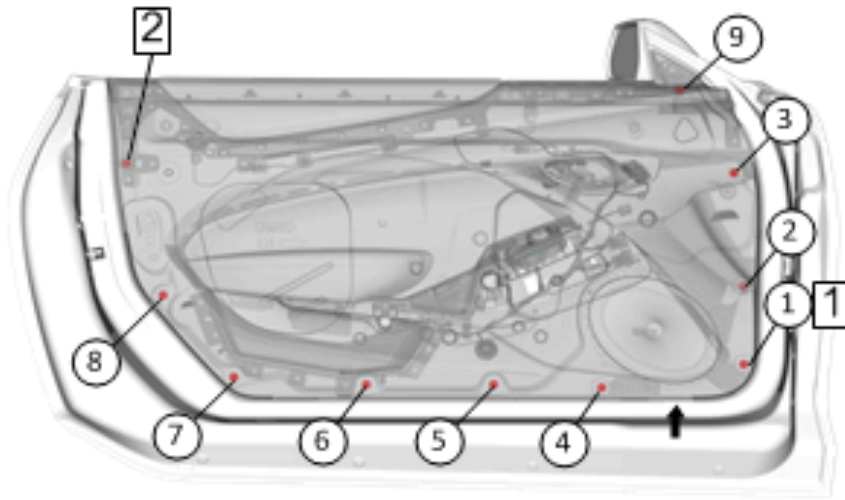

Note:

- Use service notch on door trim panel and start detachment of retainer in order shown.
- Belt line clips are still engaged. Do Not remove safety high retention clip (2).


5. Front Side Door Trim Retainer (1) » Remove [9x]

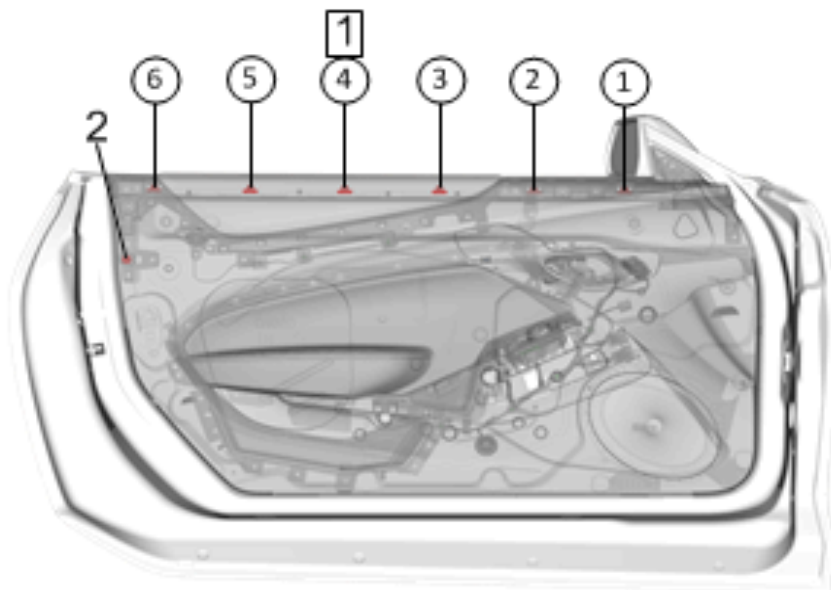

Note:

- Pull out door trim along top edge to detach belt line clips from door panel.
- Do Not remove safety high retention clip. (2)

6. Front Side Door Trim Retainer (1) » Remove [6x]

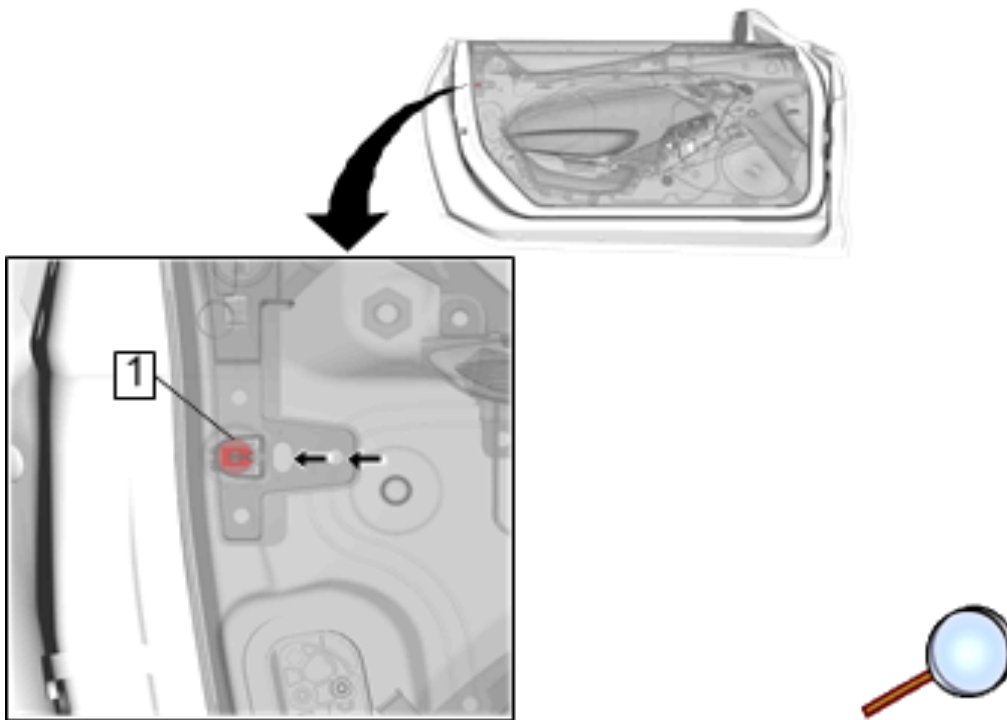


Note:

- Pull out door trim carefully to avoid damage.
- Manually remove safety high retention clip from sheet metal hole.
- Discard old door trim retainer clips and replace with new.


7. Pivot the door trim from front end until both locator pins are out of the holes and then hit the front part of the door trim to remove the safety high retention clip (1) out of dog house.
8. Disconnect the door lock retainer cable from the door trim panel and inside handle.
9. Disconnect the electrical connectors.

Installation Procedure


1. Connect the electrical connectors.
2. Connect the door lock retainer cable to the door trim panel and inside handle.

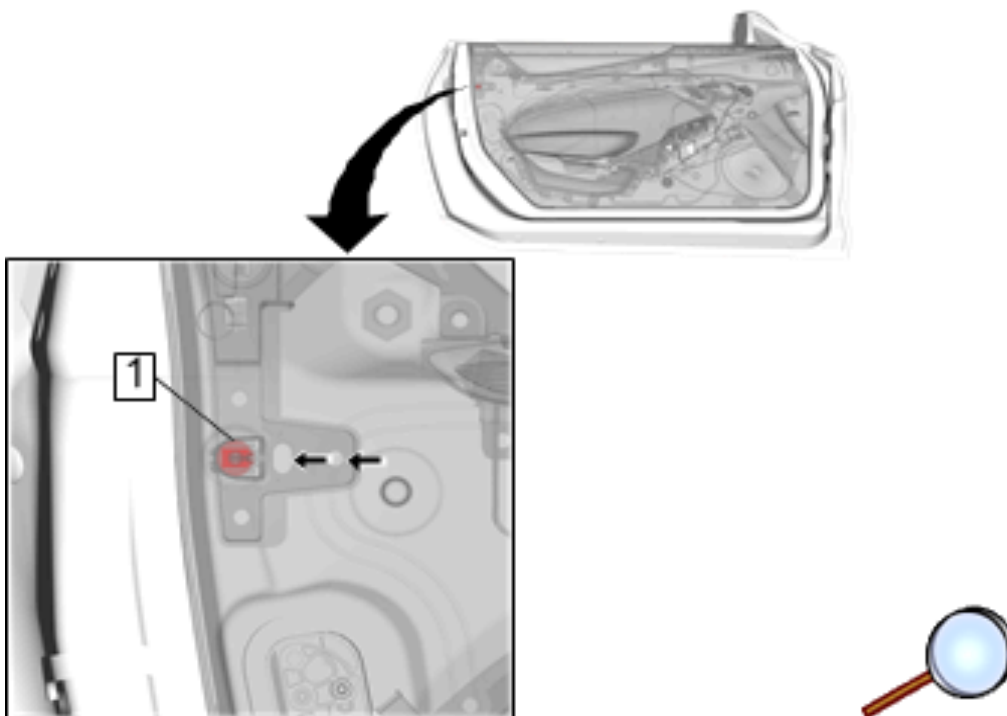


3. Safety High Retention Clip (1) » Install

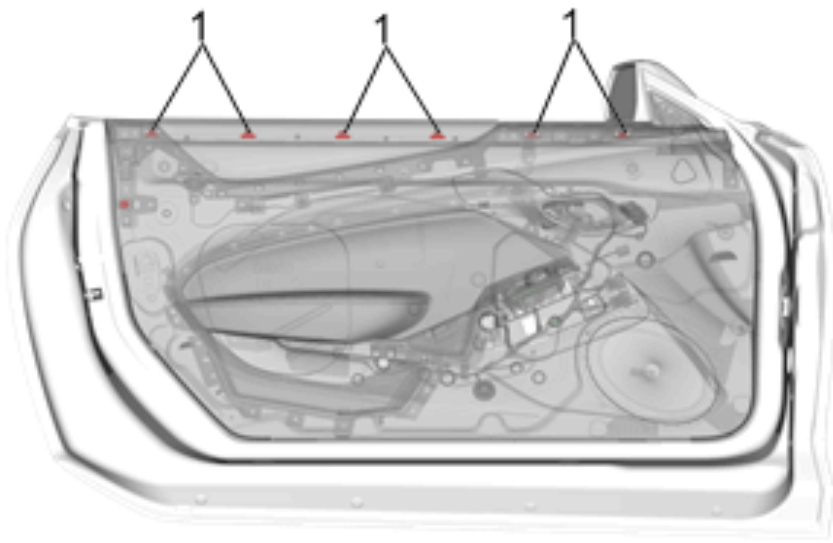

4. Front Side Door Trim Retainer (1) » Install [6x]

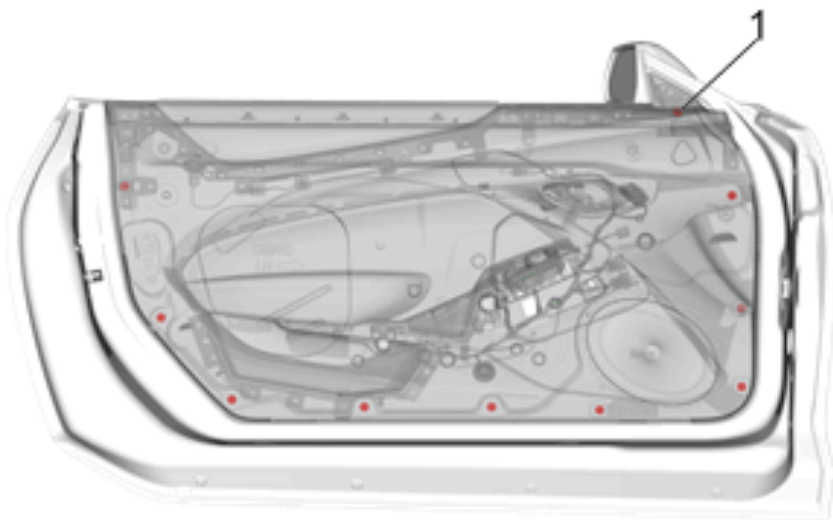


5. Front Side Door Trim Retainer (1) » Install [10x]

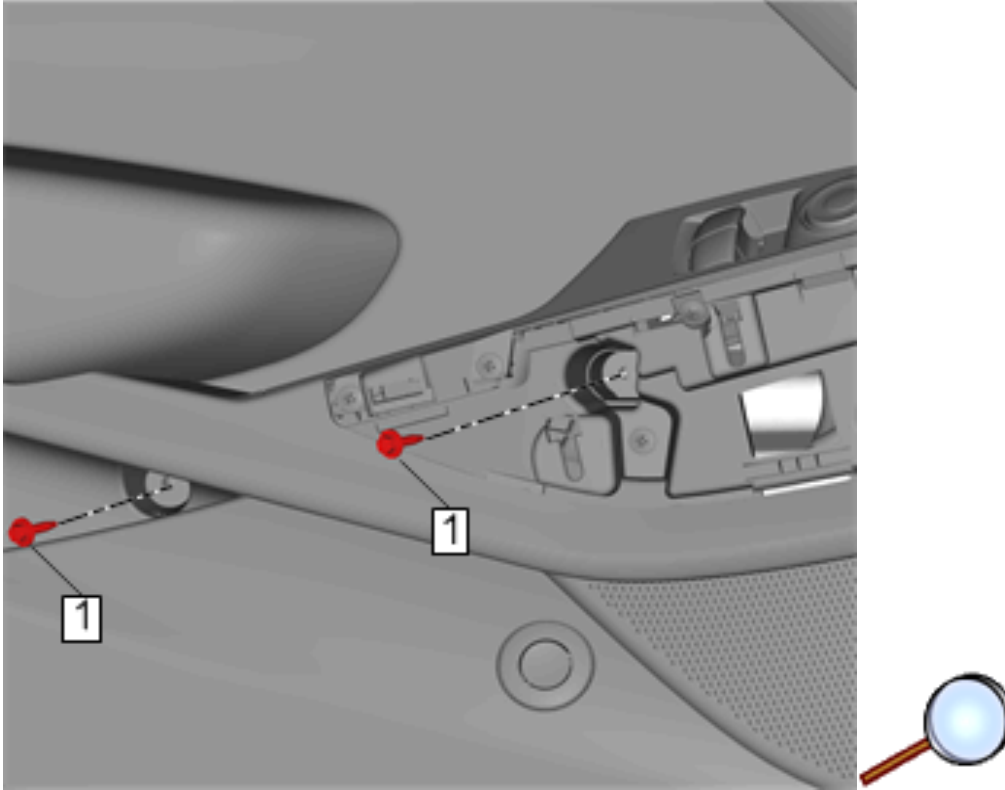

Caution: Refer to [Fastener Caution](#).

6. Front Side Door Trim Bolt (1) » Install and tighten [2x] **2.2 N·m (19 lb in)**

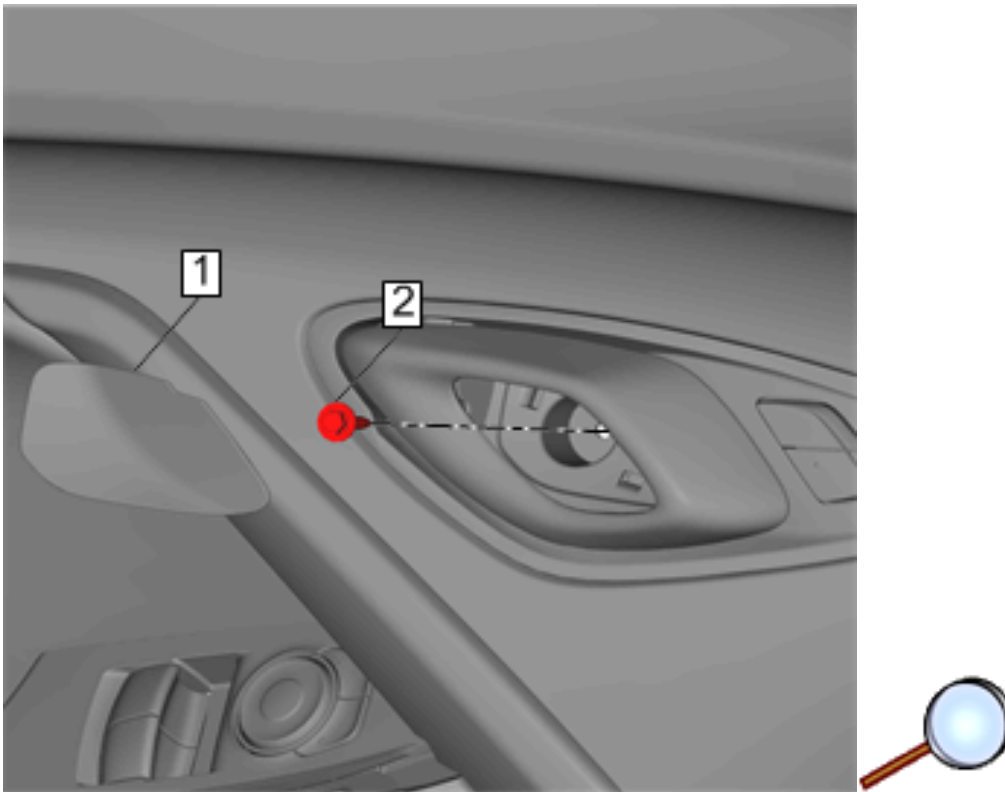

7. Front Side Door Trim Bolt(2) » Install and tighten **2.2 N·m (19 lb in)**

8. Front Side Door Inside Handle Bolt Finish Cap (1) » Install

9. [Front Side Door Pull Handle Cover Replacement](#) » Install